



▶ 鉄筋コンクリートU型 (JIS A 5305) ◀

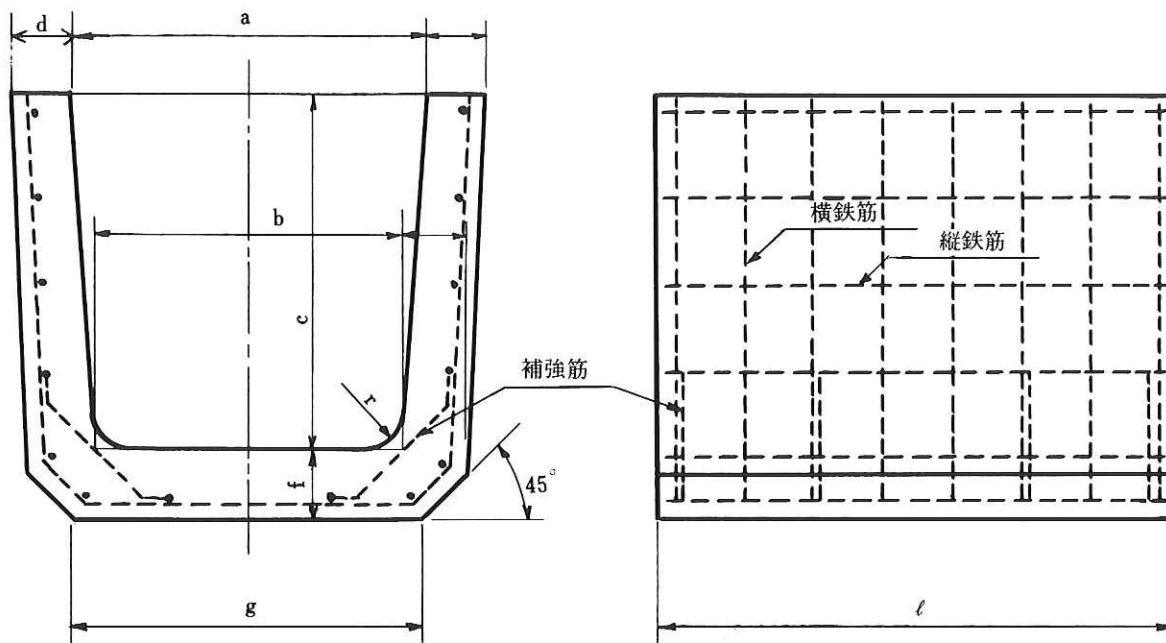

(注) 補強筋は呼び名600のU形についてのみ径6.0mmのものを両側にそれぞれ4個所入れる。

呼 び 方	寸 法									重 量 kg	鉄 筋				
	a	b	c	d	e	f	g	r	ℓ		縦 鉄 筋		横 鉄 筋		
											径 mm	数 量 本	径 mm	数 量 本	
鉄筋コンクリートU形	150	150	140	150	30	35	35	160	30	600	25	2.6	5	2.6	5
										1,000	42				8
	180	180	170	180	35	40	40	190	50	600	34	2.6	5	2.6	5
										1,000	57				8
	240	240	220	240	45	50	50	240	50	600	55	3.2	7	3.2	5
										1,000	92				8
	300A	300	260	240	50	60	60	300	50	600	70	3.2	9	4.0	5
	300B	300	260	300	50	60	60	300	50	600	79	3.2	9	4.0	5
										1,000	131				8
	300C	300	260	360	50	60	65	300	50	600	92	3.2	11	4.0	7
	360A	360	310	300	50	65	65	360	50	600	91	4.0	11	4.0	6
	360B	360	310	360	50	65	65	360	50	600	101	4.0	11	4.0	8
450	450	400	450	55	70	70	430	70	600	136	4.0	13	5.0	8	
600	600	540	600	70	80	80	600	70	600	212	6.0	15	6.0	8	

▶鉄筋コンクリートU形用蓋(JIS A 5334)◀

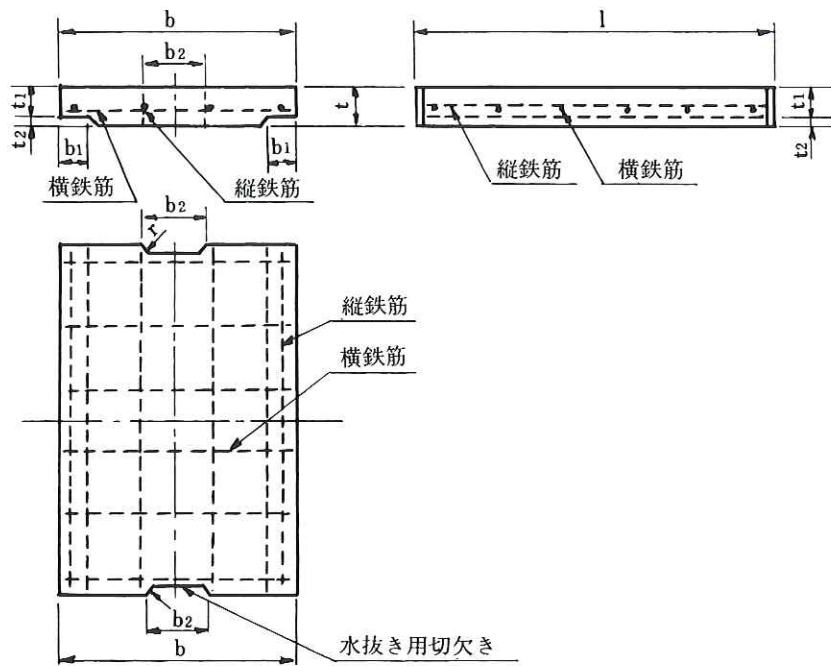

寸法・鉄筋表

単位mm

種類	呼び名	寸法								鉄筋				重量 kg
		b	b ₁	t	t ₁	t ₂	l	r	b ₂	縦鉄筋		横鉄筋		
										径	数量(本)	径	数量(本)	
1 種	150	210	35	35	30	5	600	15	75	2.6	3	2.6	5	10
	180	250	40	40	35	5	600	15	75	2.6	3	2.6	6	14
	240	330	50	45	40	5	600	15	90	3.2	4	3.2	6	20
	300	400	55	60	50	10	600	15	100	3.2	4	4.0	6	32
	360	460	55	65	55	10	600	18	120	3.2	4	5.0	6	41
	450	560	60	70	60	10	600	18	120	4.0	5	6.0	5	54
	600	740	75	75	65	10	600	18	150	4.0	6	6.0	6	77
2 種	150	210	35	90	80	10	600	15	75	6.0	3	6.0	7	26
	180	250	40	90	80	10	600	15	75	6.0	4	D10	5	31
	240	330	50	100	85	15	600	15	90	6.0	5	D10	5	44
	300	400	55	100	85	15	600	15	100	6.0	6	D10	6	54
	360	460	55	100	85	15	600	18	120	6.0	7	D10	7	63
	450	560	60	120	100	20	600	18	120	D10	6	D10	7	92
	600	740	75	150	130	20	600	18	150	D10	6	13.0	6	153

寸法の許容量

b 及び l	t t ₁ t ₂ 及び b ₁ b ₂
± 3	± 2